

6630 **20.4 Solutions of Exercises of Chapter 9: Weak Focusing**
 6631 **Synchrotron**

6632 **9.1**

6633 **Construct SATURNE I. Spin Resonances**

6634 A photo of SATURNE I synchrotron can be found in Fig. 9.1. A schematic layout
 6635 of the ring and 90 deg cell is given in Fig. 9.20. This figure as well as Tab. 9.1
 6636 which lists the parameters of the synchrotron, will be referred to in building the
 6637 SATURNE I ring in the following.

6638 (a) A model of SATURNE I synchrotron.

6639 DIPOLE is used to simulate the 90° cell dipole, data are set for a hard-edge model
 6640 in this exercise (for a DIPOLE model including fringe field, refer to the ZGS case,
 6641 Exercise 9.2).

6642 It is necessary to have Fig. 20.55 at hand (in addition to the users' guide), when
 6643 filling up the data list under DIPOLE. Some guidance regarding these data:

- 6644 • DIPOLE is defined in a cylindrical coordinate system.
- 6645 • AT is given the value of the bending sector extent: AT=90 degrees. The dipole
 EFBs coincide with DIPOLE entrance and exit boundaries.
- 6646 • RM is given the curvature radius value, $RM = B\rho/B = 0.274426548 [\text{T m}] /$
 0.03259493 [T] = 8.4193 m, as it fits the geometry of the optical axis around the
 ring. The field value matches the reference rigidity under OBJET, these are the
 injection energy values, 3.6 MeV, proton.
- 6647 • ACENT=45 deg is the reference azimuth, for the positioning of the entrance and
 exit EFBs. It is taken half-way of the AT range, an arbitrary choice.

6653 KPOS=2 allows cancelling the coordinates of particle 1 (considered here as the
 6654 reference trajectory, coinciding with the optical axis around the ring) at entrance
 6655 and exit of DIPOLE:

- 6656 • The entrance and exit radii in and out of the AT sector for a particle on the closed
 orbit (*i.e.*, a particle travelling along the design optical axis) are $RE = RS = RM$.
- 6657 • The angle TE identifies with the closed orbit angle at the entrance boundary:
 TE=0, the closed orbit is normal to the EFB. TS identifies with the closed orbit
 angle at the exit boundary: TE=0, the closed orbit is normal to the EFB.

6661 A 90 deg sector in the hard edge model is given in Tab. 20.46; note that the
 6662 sector has been split in two 45 deg halves, this is in order to allow a possible
 6663 insertion of a beam monitor, so requiring $AT = 45 \text{ deg}$, $\omega^+ = -\omega^- = 22.5 \text{ deg}$.
 6664 FAISCEAU located next to DIPOLE indicates that a trajectory entering DIPOLE
 6665 at radius $R = RM$, normally to the EFB (thus, $Y_0 = 0$ and $T_0 = 0$ in OBJET) exits
 6666 with $Y = 0$ and $T = 0$. Data validation at this stage can be performed by comparing
 6667 DIPOLE's transport matrix computed with MATRIX (Tab. 20.47), and theoretical
 6668 expectations (Sect. 18.2, Eq. 18.6):

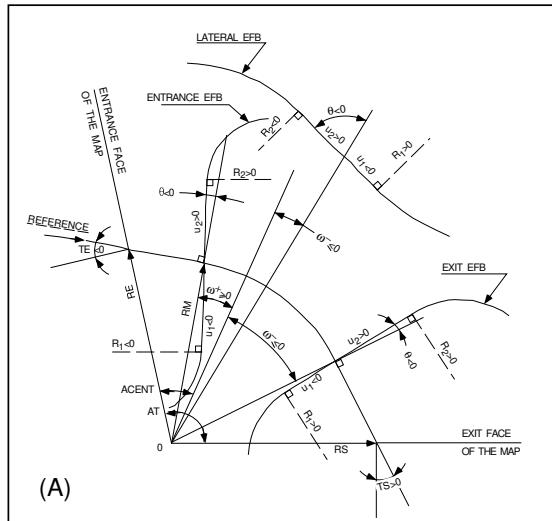


Fig. 20.55 A representation of the data that define a dipole magnet, using DIPOLE [1]

$$\begin{aligned} \alpha &= \pi/2, \\ \rho &= 8.4193 \\ n &= 0.6 \\ \text{(Eq. 18.6)} & \quad \left[T_{ij} \right] = \begin{pmatrix} 0.545794 & 11.15444 & 0 & 0 & 0 & 9.560222 \\ 0.062944 & 0.545794 & 0 & 0 & 0 & 1.324865 \\ 0 & 0 & 0.346711 & 10.19506 & 0 & 0 \\ 0 & 0 & -0.086295 & 0.346711 & 0 & 0 \\ 1.324865 & 9.560222 & 0 & 0 & 1 & 5.17640 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{pmatrix} \end{aligned} \quad (20.13)$$

6669

6670 Introducing fringe fields

6671 The SATURNE ring simulations which follow use the hard edge model. However, it
 6672 is leisurable, at this point, to choose to add fringe fields in the model; here are the
 6673 changes which would be needed if so desired:

- 6674 • The bending sector is 90 degrees, however the field region extent AT has to
 6675 encompass the fringe fields, at both ends of the 90 deg sector. A 5 deg extension
 6676 is taken (namely, ACENT - ω^+ = AT - ACENT + ω^- = 5 deg), for a total
 6677 AT=100 deg which allows $RM \times \tan(ACENT - \omega^+) \approx 74$ cm; this large extension
 6678 ensures absence of truncation of the fringe fields at the AT sector boundaries,
 6679 over the all radial excursion of the beam.
- 6680 • ACENT=50 deg is the reference azimuth (an arbitrary value; taken half-way of
 6681 the AT range for convenience), for the positioning of the entrance and exit EFBs.
- 6682 • The entrance radius in the AT sector is $RE = RM / \cos(AT - \omega^+) = RM / \cos(5^\circ)$,
 6683 with $\omega^+ = 45$ deg the positioning of the entrance EFB with respect to ACENT.
 6684 And similarly for the positioning of the exit reference frame, $RS = RM / \cos(AT -$

Table 20.46 Simulation input data file: a pair of adjacent 45 degree sectors in the hard edge model. The magnet is split in order to allow insertion of FAISTORE or (here) FAISCEAU for beam monitoring. The reference optical axis has equal entrance (RE) and exit (RS) positions, and null angles (TE and TS), it coincides with the arc of radius $R = RM$ inside the sector. This input data file is named SatI_DIP.inc and defines the SATURNE I cell sequence segment S_SatI_DIP to E_SatI_DIP, for INCLUDE statements in subsequent exercises

```

File name: SatI_DIP.inc
! SATURNE I. Hard edge dipole model. Transport matrix.
'MARKER' SatI_DIP.inc_S                                         ! Just for edition purposes.
'OBJET'
0.274426548e3                                                 ! Reference Brho: 3.6 MeV proton.
5                                                               ! Create a 13 particle set, proper for MATRIX computation.
.001 .01 .001 .01 .001 .0001                                ! Coordinate sampling.
0. 0. 0. 0. 1.                                              ! Reference trajectory: all initial coordinates nul, relative rigidity D=1.
1

'MARKER' S_SatI_DIP      ! Cell dipole begins here. A marker used for INCLUDEs in subsequent exercises.

'DIPOLE' upstream_half                                     ! Analytical modeling of a dipole magnet.
2                                                               ! IL=2 here, to log trajectory coordinates in zgoubi.plt, at integration steps.
45. 841.93                                                 ! Field region angle=90; reference radius set to curvature radius value.
22.5 0.3259493638 -0.6 0. 0.   ! Reference angle ACENT set to AT/2; Bo field at RM; indices, all zero.
.0 0.                                                       ! EFB 1, hard-edged.
4 .1455  2.2670 -.6395  1.1558  0. 0. 0.                ! Enge coefficients.
22.5 0. 1.E6 -1.E6 1.E6 1.E6                               ! Angle to ACENT; face angle; face is straight.
.0 0.                                                       ! EFB 2, hard-edged.
4 .1455  2.2670 -.6395  1.1558  0. 0. 0.                ! EFB 3, Unused.
-22.5 0. 1.E6 -1.E6 1.E6 1.E6
0. 0. 0. 0. 0. 0. 0. 0. 0. 0. 0. 0. 0. 0. 0.             ! Degree of interpolation polynomial; flying grid sizing.
2. 841.93 0. 841.93 0.                                     ! Integration step size. It can be large in uniform field.
2 841.93 0. 841.93 0.                                     ! Positioning of entrance and exit frames.
'MARKER' half-dipole !.plt                                  ! Uncomment LABEL_2='!.plt' (may go with IL=2 under DIPOLE)
                                                       ! log particle data in zgoubi.plt.

'FAISCEAU'          ! Provides local coordinates, and ellipse parameters, at center of SATURNE I dipole.
'DIPOLE' downstream_half                                    ! Analytical modeling of a dipole magnet.
2                                                               ! IL=2 here, to log trajectory coordinates in zgoubi.plt, at integration steps.
45. 841.93                                                 ! Field region angle=90; reference radius set to curvature radius value.
22.5 0.3259493638 -0.6 0. 0.   ! Reference angle ACENT set to AT/2; Bo field at RM; indices, all zero.
.0 0.                                                       ! EFB 1, hard-edged.
4 .1455  2.2670 -.6395  1.1558  0. 0. 0.                ! Enge coefficients.
22.5 0. 1.E6 -1.E6 1.E6 1.E6                               ! Angle to ACENT; face angle; face is straight.
.0 0.                                                       ! EFB 2, hard-edged.
4 .1455  2.2670 -.6395  1.1558  0. 0. 0.                ! EFB 3, Unused.
-22.5 0. 1.E6 -1.E6 1.E6 1.E6
0. 0. 0. 0. 0. 0. 0. 0. 0. 0. 0. 0. 0. 0. 0.             ! Degree of interpolation polynomial; flying grid sizing.
2. 841.93 0. 841.93 0.                                     ! Integration step size. It can be large in uniform field.
2 841.93 0. 841.93 0.                                     ! Positioning of entrance and exit frames.

'MARKER' E_SatI_DIP      ! Cell dipole ends here. A marker used for INCLUDEs in subsequent exercises.

'FAISCEAU'
'MATRIX'                                                 ! Local particle coordinates.
1 0                                                       ! Compute transport matrix, from trajectory coordinates.

'MARKER'  SatI_DIP.inc_E                                 ! Just for edition purposes.
'END'

```

- 6685 $(ACENT - \omega^-) = RM/\cos(5^\circ)$ with $\omega^- = -45$ deg the positioning of the exit
 6686 EFB. Note that $\omega^+ - \omega^- = 90^\circ$, the value of the bend angle.
 6687 • The entrance angle TE identifies with the angular increase of the sector: $TE=5$ deg.
 6688 And similarly for the positioning of exit frame, 5 deg downstream of the exit EFB,
 6689 thus $TS=5$ deg.
 6690 • Negative drifts with length $RM \times \tan(ACENT - \omega^+) = 0.7366545469$ cm need
 6691 to be added upstream and downstream of DIPOLE, to account for the optical axis
 6692 additional length over the 5 deg angular extent.

Table 20.47 Outcomes of the simulation file of Tab. 20.46

An excerpt from zgoubi.res. Coordinates of the first particle (considered here as the reference trajectory) and its path length under FAISCEAU, at OBJET on the left hand side below, locally on the right hand side:

```
3 Keyword, label(s) : FAISCEAU
                         TRACE DU FAISCEAU
                         (follows element #      2)
                         13 TRAJECTOIRES
OBJET                               FAISCEAU
D       Y(cm)     T(mr)    Z(cm)     P(mr)     S(cm)     D-1      Y(cm)     T(mr)    Z(cm)     P(mr)     S(cm)
0   1. 0.0000  0.0000  0.0000  0.0000  0.0000  0.0000  0.0000  0.0000  0.0000  0.0000  1.322501E+03
```

Transport matrix of SATURNE I 90 degree sector bend, in the hard edge model, two difference cases of integration step size, namely, 4 cm and 1 m (an excerpt of MATRIX computation, from zgoubi.res). It can be checked against matrix transport expectations. The “first order symplectic conditions” are very small in the 4 cm step size case, which is an indication of accurate numerical integration of the trajectories across DIPOLE; the reference trajectory (first one) exists better aligned (reference coordinates, before change of frame for MATRIX computation, are closer to zero):

- Case of 4 cm step size:

```
4 Keyword, label(s) : MATRIX
Reference, before change of frame (particle # 1 - D-1,Y,T,Z,s,time) :
0.00000000E+00 4.53054326E-07 6.27843350E-07 0.00000000E+00 0.00000000E+00 1.32250055E+03 4.41138700E-02
TRANSFER MATRIX ORDRE 1 (MKSA units)
0.545795 11.1544 0.00000 0.00000 0.00000 9.56022
-6.294423E-02 0.545795 0.00000 0.00000 0.00000 1.32487
0.00000 0.00000 0.346711 10.1951 0.00000 0.00000
0.00000 0.00000 -8.629576E-02 0.346711 0.00000 0.00000
1.32487 9.56022 0.00000 0.00000 1.00000 5.17640
0.00000 0.00000 0.00000 0.00000 0.00000 1.00000
DetY-1 = 0.0000000278, DetZ-1 = 0.000000045
```

- Case of 1 m step size:

```
4 Keyword, label(s) : MATRIX
Reference, before change of frame (particle # 1 - D-1,Y,T,Z,s,time) :
0.00000000E+00 -7.54923113E-03 -1.08904867E-02 0.00000000E+00 0.00000000E+00 1.32249873E+03 4.41138091E-02
TRANSFER MATRIX ORDRE 1 (MKSA units)
0.545757 11.1567 0.00000 0.00000 0.00000 9.56154
-6.295274E-02 0.546125 0.00000 0.00000 0.00000 1.32517
0.00000 0.00000 0.346697 10.1954 0.00000 0.00000
0.00000 0.00000 -8.629900E-02 0.346750 0.00000 0.00000
1.32486 9.56148 0.00000 0.00000 1.00000 5.17692
0.00000 0.00000 0.00000 0.00000 0.00000 1.00000
DetY-1 = 0.0003978566, DetZ-1 = 0.0000685588
```

6693 (b) SATURNE I cell.

6694 A cell with origin in the middle of the drift is given Tab. 20.48, it is comprised of
6695 the split dipole and a pair of 2 m half-drifts at each ends (Fig. 9.20).

6696 *Closed orbit; chromatic closed orbit*

6697 The on-momentum closed orbit has been set to zero along the drifts ($Y_{c.o.} \equiv 0$),
6698 above, by a proper choice of RE, RS radii and TE, TS incidence angles.

Table 20.48 Simulation input data file: SATURNE I cell, assembled by INCLUDE-ing DIPOLE taken from Tab. 20.46 together with two half-drifts. This input data file is named SatI_cell.inc and defines the SATURNE I cell sequence segment S_SatI_cell to E_SatI_cell, for INCLUDE statements in subsequent exercises

```

File name: SatI_cell.inc.
! SATURNE I, one cell of the 4-period ring.
'MARKER' SatICellMATRIX_S                                         ! Just for edition purposes.
'OBJET'
0.274426548e3                                                 ! Reference Brho: 3.6 MeV proton.
5                                                               ! Create a 13 particle set, proper for MATRIX computation.
.001 .01 .001 .01 .001 .0001                                         ! Coordinate sampling.
0. 0. 0. 0. 1.                                                 ! Reference trajectory: all initial coordinates nul, relative rigidity D=1.

'MARKER' S_SatI_cell
'DRIFT' half_drift
200
'INCLUDE'
1
./SatI_DIP.inc[S_SatI_DIP:E_SatI_DIP]
'DRIFT' half_drift
200.
'MARKER' E_SatI_cell
'FAISCEAU'                                                       ! Local particle coordinates.
'TWISS' ! Produce transport matrix, beam matrix, and periodic optical functions along the sequence.
2 1. 1.                                                       ! Just for edition purposes.
'MARKER' SatICellMATRIX_E
'END'

```

The radial coordinate of an off-momentum chromatic orbit can be estimated from the dispersion, Eq. 9.26, namely,

$$Y_\delta = \frac{\rho_0}{1-n} \frac{\delta p}{p} = 841.93 \frac{10^{-4}}{1 - (-0.6)} \approx 0.21048 \text{ cm}$$

whereas the orbit angle is zero, around the ring (on- and off-momentum closed orbits are parallel to the optical axis).

Besides,

- computation of an accurate value of Y_δ is performed adding FIT at the end of the cell;
- in order to raytrace three particles, respectively on-momentum and at $\delta p/p = \pm 10^{-4}$, OBJET[KOBJ=2] is used;
- in order to raytrace around the ring, for the purpose of plotting the closed orbit coordinates, a 4-cell sequence follows the FIT procedure.

This results in the input data file given in Tab. 20.49. Running this input simulation file produces the following coordinates as per the FIT procedure (an excerpt from zgoubi.res):

```

6711      STATUS OF VARIABLES (Iteration #   4 /    999 max.)
6712      LMNT VAR PARAM  MINIMUM   INITIAL     FINAL      MAXIMUM    STEP      NAME    LBL1          LBL2
6713      2   1   30  0.168    0.211  0.21956000  0.253  1.040E-05 OBJET    -
6714      2   2   40  0.00     0.00   0.00000000  0.00   0.00  OBJET    -
6715      2   3   50 -0.253   -0.210  -0.21040403 -0.168  1.040E-05 OBJET    -
6716      STATUS OF CONSTRAINTS (Target penalty = 1.0000E-10)
6717      TYPE  I  J  LMNT#  DESIRED     WEIGHT      REACHED     KI2      NAME    LBL1          LBL2      Nb param. [value]
6718      3   1   2   12  0.000000E+00  1.000E+00  1.466978E-06  6.70E-01 MARKER  E_SatI_cell    -          0
6719      3   2   2   12  0.000000E+00  1.000E+00  6.028957E-07  1.13E-01 MARKER  E_SatI_cell    -          0
6720      3   3   2   12  0.000000E+00  1.000E+00  8.357183E-07  2.17E-01 MARKER  E_SatI_cell    -          0
6721      Fit reached penalty value 3.2139E-12

```

The local coordinates Y, T and initial coordinates Y_0, T_0 (as defined under OBJET) are identical to better than $5 \mu\text{m}$, $0.5 \mu\text{rad}$ accuracy, respectively, confirming the

periodicity of these chromatic trajectories. Orbit coordinates around the ring are displayed in Fig. 20.56.

Table 20.49 Simulation input data file: first find the periodic orbit through a cell, then complete a 4-cell turn

```

SatI_Orbits.INC.dat: SATURNE I, on-momentum and chromatic orbits.
'MARKER' SatI_Orbits_S                                         ! Just for edition purposes.
'OBJET'
0.274426548e3
2
3 1
+.210560 0. 0. 0. 1.0001 'p' ! Chromatic orbit coordinates Y0 and T0 for D=1.001 relative rigidity.
0. 0. 0. 0. 1. 'o'                                                 ! On-momentum orbit.
-.210404 0. 0. 0. 0.9999 'm' ! Chromatic orbit coordinates Y0 and T0 for D=0.999 relative rigidity.
1 1 1

'INCLUDE'
1
./SatI_cell.inc[S_SatI_cell:E_SatI_cell]

'FIT'
2
2 30 0 .2
2 50 0 .2
2
3.1 1 2 #End 0. 1. 0
3.1 3 2 #End 0. 1. 0
                                         ! Constrain Y(particle 1)=Y_(particle 1).
                                         ! Constrain Y(particle 1)=Y_(particle 1).

!      When FIT is done converging on the constraints, execution quietly carries on with the periodic
!      coordinates , raytracing through 4 cells to complete a turn around the ring.
'INCLUDE'
1
4 * ./SatI_cell.inc[S_SatI_cell:E_SatI_cell]

'SYSTEM'
1
gnuplot < gnuplot_Zplt_traj.gnu                                     ! Plot the orbit radial coordinate.
'MARKER' SatI_Orbits_E                                         ! Just for edition purposes.
'END'

```

A gnuplot script (excerpt) to obtain a graph of particle coordinates, from zgoubi.plt (as in Fig. 20.56):


```

# gnuplot_Zplt_traj.gnu
traj1 = 1 ; traj2 = 3
plot \
for [i=traj1:traj2] 'zgoubi.plt' u ($19== i ? $14 *cm2m : 1/0):($10 *cm2m):($19) w p ps .4 lc palette

```

6725

Fig. 20.56 Radial coordinate of the orbits around the ring, on-momentum, and for $d\mathbf{p}/\mathbf{p} = \pm 10^{-3}$. This graph is obtained using zpop, data read from zgoubi.plt: menu 7; 1/1 to open zgoubi.plt; 2/[6,2] for Y versus distance s ; 7 to plot. A gnuplot script for a similar graph given is given in Tab. 20.49

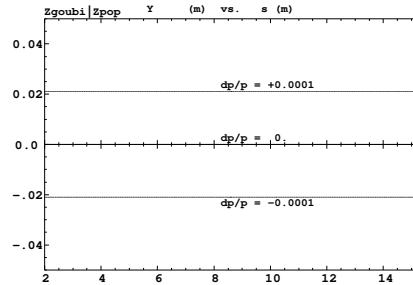

6726 *Lattice parameters*

6727 The TWISS command down the sequence (Tab. 20.48) produces the periodic beam
 matrix results shown in Tab. 20.50; MATRIX[IFOC=11] would, as well. It also

Table 20.50 Results obtained running the simulation input data file of Tab. 20.48, SATURNE I
 cell - an excerpt from zgoubi.res

```
14 Keyword, label(s) : TWISS
Reference, before change of frame (particle # 1 - D-1,Y,T,Z,s,time) :
 0.00000000E+00  6.02895730E-07  6.54169939E-07  0.00000000E+00  0.00000000E+00  1.72250055E+03  6.57784696E-01

Beam matrix (beta/-alpha/-alpha/gamma) and periodic dispersion (MKSA units)
 14.418595  0.000000  0.000000  0.000000  0.000000  21.048250
 0.000000  0.069355  0.000000  0.000000  0.000000  0.000000
 0.000000  0.000000  11.411041  0.000000  0.000000  -0.000000
 0.000000  0.000000  0.000000  0.087634  0.000000  0.000000
 0.000000  0.000000  0.000000  0.000000  0.000000  0.000000
 0.000000  0.000000  0.000000  0.000000  0.000000  0.000000

Betatron tunes (Q1 Q2 modes)
NU_Y =  0.18103144  NU_Z =  0.22214599

dL/L / dp/p =  1.9194487
(dp =  0.000000E+00  L(0) =  1.72250E+03 cm,  L(0)-L(-dp) =  3.30606E-01 cm,  L(0)-L(+dp) =  -3.30645E-01 cm)

Transition gamma = 7.21791469E-01

Chromaticities :
dNu_y / dp/p = -0.60221729  dNu_z / dp/p =  0.38005442
```

6728 produces a zgoubi.TWISS.out file which details the optical functions along the
 6729 sequence (at the downstream end of the optical elements. The header of that file
 6730 details the optical parameters of the structure (Tab. 20.51).
 6731

Table 20.51 An excerpt of zgoubi.TWISS.out file resulting from the execution of the SATURNE I cell simulation input data file of Tab. 20.48. Note that the ring (4-period) wave numbers are 4 times the cell values Q1, Q2 displayed here. Optical functions (betatron function and derivative, orbit, phase advance, etc.) along the optical sequence are listed as part of zgoubi.TWISS.out following the header. The top part and last line of that listing are given below

```

@ LENGTH      %le    17.22500552
@ ALFA        %le    1.919448767
@ ORBITS      %le    -0
@ GAMMATR     %le    0.7217914685
@ Q1          %le    0.1810314404 [fractional]
@ Q2          %le    0.2221459901 [fractional]
@ DQ1         %le    -0.6022172911
@ DQ2         %le    0.3800544183
@ DXMAX       %le    2.10586311E+01 @ DXMIN      %le    2.10482503E+01
@ DYMAX       %le    0.00000000E+00 @ DYMINT     %le    0.00000000E+00
@ XCOMAX      %le    2.10528896E-01 @ XCOMIN      %le    0.00000000E+00
@ YCOMAX      %le    0.00000000E+00 @ YCOMIN      %le    0.00000000E+00
@ BETXMAX     %le    1.57006971E+01 @ BETXMIN     %le    1.44132839E+01
@ BETYMAX     %le    1.30884296E+01 @ BETYMIN     %le    1.14110171E+01
@ XCORMS      %le    6.05227342E-04
@ YCORMS      %le    0. not computed
@ DXRMS       %le    2.98427468E-03
@ DYRMS       %le    0.00000000E+00

```

Optical functions listing zgoubi.TWISS.out (there is more: $D_{x,y}$, etc.: lines are truncated, here), including the periodic $\alpha_{x,y,l}$, $\beta_{x,y,l}$, $D_{x,y}$, etc.

```

# alfx        btx        alfy        bty        alfl        btl        Dx          Dxp
# 1           2           3           4           5           6           7           8
1.3683565E-08 1.4426805E+01 -6.6336606E-09 1.1411067E+01 0.0000000E+00 0.0000000E+00 2.1058631E+01 1.1261490E-03
2.3958789E-08 1.4426805E+01 -2.0952612E-10 1.1411067E+01 0.0000000E+00 0.0000000E+00 2.1048250E+01 3.4685148E-09
2.3958789E-08 1.4426805E+01 -2.0952612E-10 1.1411067E+01 0.0000000E+00 0.0000000E+00 2.1048250E+01 3.4685148E-09
-1.3863081E-01 1.4704066E+01 -1.7526845E+01 1.1761604E+01 0.0000000E+00 0.0000000E+00 2.1048250E+01 3.4685148E-09
-1.3863081E-01 1.4704066E+01 -1.7526845E+01 1.1761604E+01 0.0000000E+00 0.0000000E+00 2.1048250E+01 3.4685148E-09
5.1661104E-04 1.5700697E+01 2.2204071E-06 1.3088430E+01 0.0000000E+00 0.0000000E+00 2.1048250E+01 1.4621225E-09
5.1661104E-04 1.5700697E+01 2.2204071E-06 1.3088430E+01 0.0000000E+00 0.0000000E+00 2.1048250E+01 1.4621225E-09
1.3919474E-01 1.4692541E+01 1.7526999E-01 1.1761559E+01 0.0000000E+00 0.0000000E+00 2.1048250E+01 3.4685146E-09
1.3919474E-01 1.4692541E+01 1.7526999E-01 1.1761559E+01 0.0000000E+00 0.0000000E+00 2.1048250E+01 3.4685146E-09
4.3383067E-04 1.4413284E+01 7.7310157E-07 1.1411017E+01 0.0000000E+00 0.0000000E+00 2.1048250E+01 3.4685146E-09
4.3383067E-04 1.4413284E+01 7.7310157E-07 1.1411017E+01 0.0000000E+00 0.0000000E+00 2.1048250E+01 3.4685146E-09

```

6732 Moving the origin of the cell

6733 The origin of the sequence can be moved by placing both drifts on one side of
 6734 DIPOLE. It can also be taken in the middle of DIPOLE, as the latter has been split.
 6735 A fully deployed input data sequence (INCLUDEs accounted for) is provided at the
 6736 top of the execution listing zgoubi.res, it can be used to copy-paste pieces around.
 6737 It can then be checked that betatron tunes, chromaticities, momentum compaction
 6738 (Tab. 20.50) do not change, and that the beam matrix does.

6739 Optical functions along the cell

They are computed by transporting the beam matrix, from the origin. A Fortran program available in zgoubi sourceforge package toolbox, betaFromPlt [1], performs this computation in the following way: OBJET[KOBJ=5.1] provides the initial beta function values (determined in the previous question); IL=2 under DIPOLE logs stepwise particle data in zgoubi.plt; 'split 10 2' added under DRIFT does it, too. The program betaFromPlt computes the transport matrix T_{step} from a step to the next by reading particle data from zgoubi.plt, and performing a similar computation to what

MATRIX does. The beam matrix σ is then transported, from step 1 to step 2, using (Eq. 19.11)

$$\sigma_2 = T_{\text{step}} \sigma_1 \tilde{T}_{\text{step}}$$

The result is displayed in Fig. 20.57.

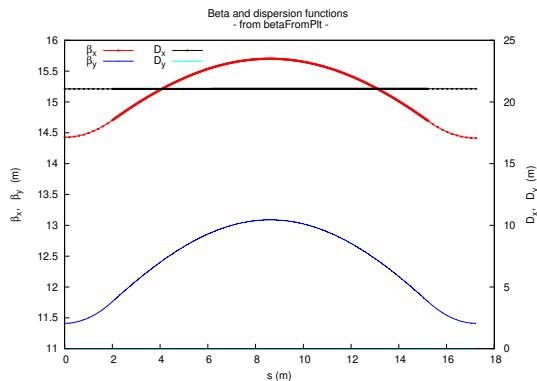


Fig. 20.57 Optical functions along SATURNE I cell. They are obtained from the transport of the beta functions, from the origin (at OBJET), using transport matrices computed from step-by-step particle coordinates stored in zgoubi.plt

6740

6741 Tune scan

6742 A simulation is given in Tab. 20.52, derived from Tab. 20.48: MATRIX[IFOC=11]
 6743 has been substituted to TWISS, a REBELOTE do loop repeatedly changes n . A
 6744 graph of the scan is given in Fig. 20.58, a few values are detailed in Tab. 20.53.

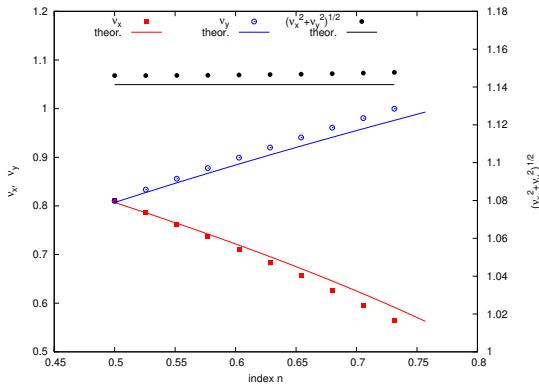


Fig. 20.58 A scan of the wave numbers, and of $\sqrt{v_Y^2 + v_Z^2} \approx \sqrt{R/\rho_0} = 1.141$, in SATURNE I for $0.5 \leq n \leq 0.757$

Table 20.52 Simulation input data file: tune scan, using REBELOTE to repeatedly change n . Beam matrix and wave numbers are computed by MATRIX, from the coordinates of the 13 particle sample generated by OBJET[KOBJ=5]

```

SATURNE I, tune scan.
'MARKER' SatI_Qscan_S
'OBJET'
0.274426548e3 ! Just for edition purposes.
5 ! Reference Brho: 3.6 MeV proton.
! Create a 13 particle set, proper for MATRIX computation.
.001 .01 .001 .01 .0001 ! Coordinate sampling.
0. 0. 0. 0. 1. ! Reference trajectory: all initial coordinates nul, relative rigidity D=1.
1

'MARKER' S_SatI_cell
'DRIFT' half_drift
200.
'INCLUDE'
1
./SatI_DIP.inc[S_SatI_DIP:E_SatI_DIP]
'DRIFT' half_drift
200.
'MARKER' E_SatI_cell
'FAISCEAU' ! Local particle coordinates.
'MATRIX'
1 11 PRINT ! Compute a 10+4 period transport matrix, and tunes. Save outcomes to zgoubi.MATRIX.out.

'REBELOTE' ! A do loop: repeat the section above commencing at the top of the file,
10 1.1 0 1 ! 10 times.
1
DIPOLE 6 -0.757:-0.5 ! Change the value of parameter 30 (namely, n) in DIPOLE (prior to repeating).
! in any DIPOLE in the sequence.

'SYSTEM'
1
gnuplot <./gnuplot_MATRIX_Qxy.gnu ! Plot tunes vs index.
'MARKER' SatI_Qscan_E ! Just for edition purposes.
'END'

```

gnuplot script to obtain Fig. 20.58:

```

# ./gnuplot_MATRIX_Qxy.gnu
set xlabel "index n"; set ylabel "({/Symbol n}_x, (({/Symbol n}_x^2+{/Symbol n}_y^2)^{1/2})"
set ylabel "({/Symbol n}_y"; set xtics; set ytics nomirror; set y2tics nomirror; ncell=4
set key t 1; set key maxrow 2; set xrange [:1.3]; set yrange [:1.06]
n1 = -0.757; dn=(-.757-.5)/10.; R=10.9658; rho=8.4193
plot \
"zgoubi.MATRIX.out" u (n1+($61-1)*dn): \
($61-1) $56 *ncell :1/0) w p pt 5 lt 1 ls .5 lc rgb "red" tit "({/Symbol n}_x ", \
"zgoubi.MATRIX.out" u (n1+($61-1)*dn):($61>1? sqrt((1+(n1+($61-1)*dn))*R/rho): \
1/0) w 1 lt 1 lc rgb "red" tit "theor. ", \
"zgoubi.MATRIX.out" u (n1+($61-1)*dn): \
($61>1? $57 *ncell :1/0) axes x1y2 w p pt 6 lt 3 lw .5 lc rgb "blue" tit "({/Symbol n}_y ", \
"zgoubi.MATRIX.out" u (n1+($61-1)*dn): \
($61>1? sqrt((-n1+($61-1)*dn)*R/rho):1/0) axes x2y2 w 1 lt 3 lc rgb "blue" tit "theor. ", \
"zgoubi.MATRIX.out" u (n1+($61-1)*dn): \
($61>1? sqrt($56**2+$57**2) *ncell :1/0) w p pt 7 lt 1 lc rgb "black" tit "({/Symbol n}_x^2+{/Symbol n}_y^2)^{1/2}" , \
"zgoubi.MATRIX.out" u (n1+($61-1)*dn):($61>1? sqrt(R/rho):1/0) w 1 lt 1 lc rgb "black" tit "theor. "
pause 1

```

Table 20.53 Dependence of wave numbers on index n , from numerical raytracing (columns denoted “ray-tr.”) and from theory

n	ray-tr.	ν_Y	ν_Z
		$\sqrt{(1-n) \frac{R}{\rho_0}}$	$\sqrt{n} \frac{R}{\rho_0}$
0.5	0.810353	0.806987	0.810353 0.806987
0.6	0.724125	0.721791	0.888583 0.884010
0.7	0.626561	0.625089	0.960806 0.954840
0.757	0.563635	0.562580	0.999804 0.992955